

# ADDITIVE MANUFACTURING POWDER

## M789 AMPO / FE-BASED ALLOYS

### Available Product Shapes

15 - 45 µm	45 - 90 µm
------------	------------

### Product Description

BÖHLER M789 AMPO is a newly developed maraging steel, which combines the mechanical properties of 1.2709 with the corrosion resistance of 17-4PH. This patent bending grade can easily be printed without any preheating and achieves a hardness of about 52 HRC with a very easy heat treatment. Furthermore, this material shows an excellent polishability, which makes it the ideal choice for inserts with conformal cooling in plastic injection molding and in any other application where a high hardness and corrosion resistance is of need.

### Properties

#### Particle size distribution 15 - 45 µm:

D10[µm]	18 - 24
D50[µm]	29 - 35
D90[µm]	42 - 50
Apparent density*	≥ 3.5 g/cm <sup>3</sup>

\* Measurement of particle size distribution is based on ISO 13322-2 (Dynamic image analysis methods);  
Flowability and apparent density are based on DIN EN ISO 4490 resp. DIN EN ISO 3923-1.

#### Achievable mechanical properties of printed part after heat treatment:

Tensile strength (Rm)	1850 ± 50 MPa
Yield strength (RP <sub>0.2</sub> )	1720 ± 50 MPa
Elongation (%)	6 ± 2
Hardness	52 ± 1 HRc
Ductility (ISO V)	10 ± 4 J

#### Particle size distribution 45 - 90 µm:

Details on request

### Applications

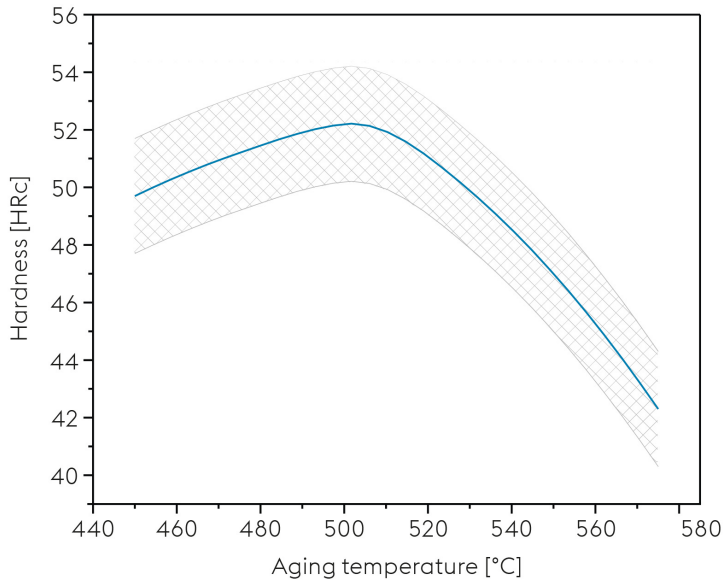
- > 3D Printing - direct metal deposition
- > Automotive Racing
- > Components for Displays
- > Lamps/Lenses for Automotive
- > Plastic Extrusion
- > Tool Holders (milling, drilling, turning & chucks)
- > 3D Printing - selective laser melting
- > Camera lenses
- > Consumer Goods - General
- > Mechanical Engineering / Machine Building General
- > Powder for additive manufacturing
- > Wind Power
- > Automotive
- > Civil and mechanical engineering
- > Injection Molding
- > Other Components
- > Unknown Components Application
- > Hotrunner systems

### Technical data

<b>Material designation</b>	
BÖHLER patent (pending)	Market grade

**Chemical composition (wt. %)**

C	Cr	Mo	Ni	Ti	Al
< 0,02	12.2	1	10	1	0.6

**Tempering chart**

Heat Treatment for optimum properties:  
Solution Annealing: 1000°C / 1h soaking time / air cooling to room temperature  
Ageing: 500°C / 3h soaking time / air cooling

For more information see [www.voestalpine.com/boehler-edelstahl](http://www.voestalpine.com/boehler-edelstahl)

The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

**voestalpine BÖHLER Edelstahl GmbH & Co KG**

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. [info@boehler-edelstahl.at](mailto:info@boehler-edelstahl.at)

[www.voestalpine.com/boehler-edelstahl](http://www.voestalpine.com/boehler-edelstahl)

**voestalpine**

ONE STEP AHEAD.