

# HOT WORK TOOL STEELS

## Available Product Variants

Long Products\*

Plates

Open Die Forgings

\* ) Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

## Product Description

BÖHLER W300 ISODISC is a 5% chromium steel and corresponds to material number 1.2343 (X37CrMoV5-1). This common tool steel has good hot toughness as well as a high hot hardness and a high resistance against heat-checkings. The combination of these properties makes it a standard choice in extrusion, forging and low-pressure die casting. This material is also available as W300 ISOBLOC which is a remelted grade with improved cleanliness, homogeneity and toughness.

## Process Melting

Airmelted

## Properties

- > Toughness & Ductility : good
- > Wear Resistance : good
- > Machinability : very high
- > Hot Hardness (red hardness) : good
- > Polishability : good
- > Thermal conductivity : good
- > Micro-cleanliness : good

## Applications

- > Extrusion
- > High Pressure Die-Casting
- > Progressive Forging (Hatebur)
- > Forging Applications
- > Rolls
- > Hotrunner systems
- > Forging (Hot / Semi-hot)
- > Injection Molding
- > Mechanical Engineering
- > General Components for Mechanical Engineering
- > Shearing / Machine Knives
- > Gravity / Low Pressure Die-Casting
- > Press Hardening / Hot Stamping
- > Fasteners, Bolts, Nuts
- > Machine knife (for producers)
- > Tool Holders (milling, drilling, turning & chucks)











## Technical data

Material designation		Standards	
1.2343	SEL	4957	EN ISO
X37CrMoV5-1	EN	G4404	JIS
T20811	UNS		
H11	AISI		
SKD6	JIS		

## Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	V
0.38	1.10	0.40	5.00	1.20	0.40

## Material characteristics

	High temperature strength	High temperature toughness	High temperature wear resistance
	★★	★★★	★★
	★★	★★★★	★★
	★★★	★★★	★★★
	★★★	★★★★	★★★
	★★★★	★★★	★★★★
	★★★	★★	★★★
	★★★	★★★★★	★★★
	★★★★★	★★★★	★★★★★
	★★	★★★★★	★★
	★★★★	★★★★	★★★★

## Delivery condition

### Annealed

Hardness (HB)	max. 229
---------------	----------

### Hardened and Tempered

Hardness (HRC)	40 to 55   bars hardened and tempered (BHT)
----------------	---

### Hardened and Tempered

Hardness (HRC)	30 to 44
----------------	----------

## Heat treatment

## Annealing

Temperature	750 to 800 °C   1,382 to 1,472 °F	Holding time 6 to 8 hours. Slow, controlled furnace cooling at 10 to 20°C/h (50 to 68 °F/hr) to approx. 600°C (1112°F), further cooling in air.
-------------	-----------------------------------	---


## Stress relieving

Temperature	600 to 670 °C   1,112 to 1,238 °F	For stress relief after extensive machining or for complicated tools. Holding time depending on tool size after complete heating 2 - 6 hours in neutral atmosphere. Slow furnace cooling.
-------------	--------------------------------------	---


## Hardening and Tempering

Temperature	1,000 to 1,030 °C   1,832 to 1,886 °F	Holding time after temperature equalization: 15 to 30 minutes; Quenching: Oil, salt bath (500 - 550°C [932-1022°F]), air, vacuum; After hardening, tempering to the desired working hardness (see tempering chart).
-------------	---------------------------------------	---

## Heat treatment sequence

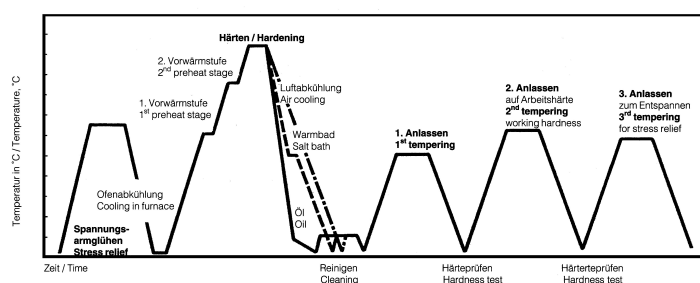


## Continuous cooling CCT curves

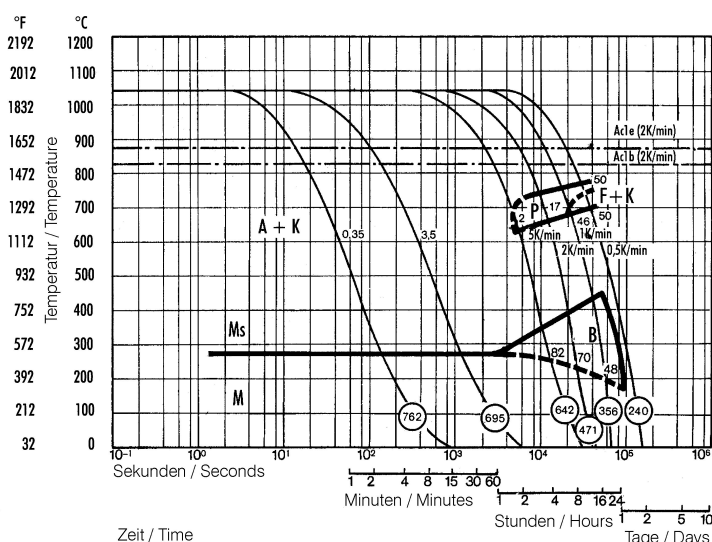


Austenitising temperature: 1030°C (1886°F)  
Holding time: 15 minutes

○ Vickers hardness  
2...46 phase percentages  
0.35...3.5 cooling parameter, i.e. duration of cooling  
from 800 - 500°C (1472-932°F) in  $s \times 10^{-2}$   
5...0.5 K/min cooling rate in K/min in the 800 - 500°C  
(1472-932°F) range

## Quantitative phase diagram

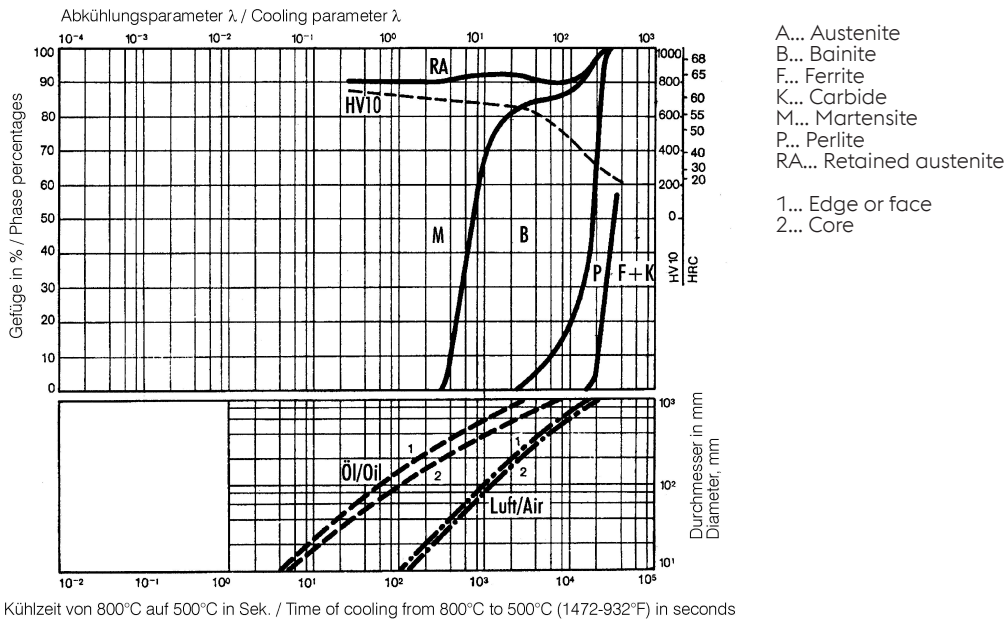

## Tempering chart

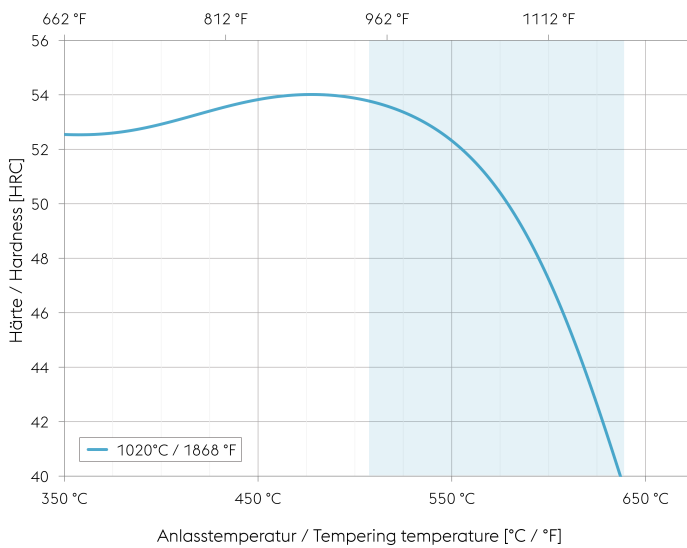

### Tempering:

Slow heating to tempering temperature immediately after hardening (time in furnace 1 hour for each 0,787 inch (20 mm) of workpiece thickness but at least 2 hours / cooling in air).

It is recommended to temper at least twice.

A third tempering cycle for the purpose of stress relieving may be advantageous.

1st tempering approx. 86°F (30°C) above maximum secondary hardness.

2nd tempering to desired working hardness.


The tempering chart shows average tempered hardness values.

3rd for stress relieving at a temperature 86 to 122°F (30 to 50°C) below highest tempering temperature.

Recommended tempering temperature range is indicated by the blue area in the chart.

Hardening temperature: 1020°C (1868°F)  
Specimen size: square 50 mm

## Hot strength chart

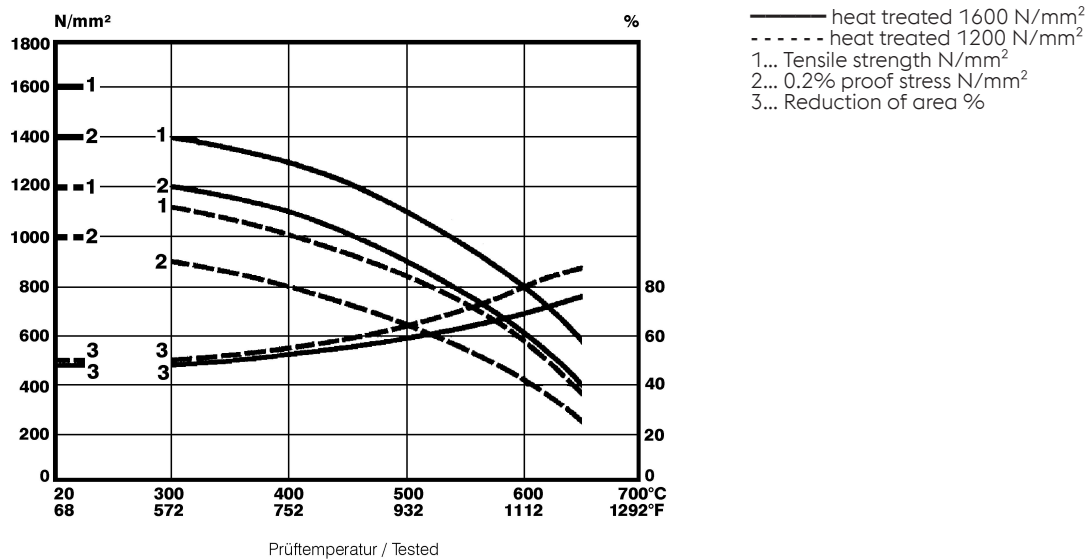

## Physical Properties

Temperature (°C   °F)	20   68
Density (kg/dm <sup>3</sup>   lb/in <sup>3</sup> )	7.8   0.28
Thermal conductivity (W/(m.K)   BTU/ft h °F)	24.9   14.39
Specific heat (kJ/kg K   BTU/lb °F)	0.46   0.1099
Spec. electrical resistance (Ohm.mm <sup>2</sup> /m   10 <sup>-4</sup> Ohm.inch <sup>2</sup> /ft)	0.52   2.46
Modulus of elasticity (10 <sup>3</sup> N/mm <sup>2</sup>   10 <sup>3</sup> ksi)	215   31.18

## Thermal Expansions between 20°C | 68°F and ...

Temperature (°C   °F)	100   212	200   392	300   572	400   752	500   932	600   1,112	700   1,292
Thermal expansion (10 <sup>-6</sup> m/(m.K)   10 <sup>-6</sup> inch/inch.°F)	11.5   6.4	12   6.7	12.2   6.8	12.5   6.9	12.9   7.2	13   7.2	13.2   7.3

**Long Products:** For additional specifications and technical requirements, please contact our regional voestalpine BÖHLER sales companies.

**Open Die Forgings:** Product Variant may differ in terms of melting process, technical data, delivery, and surface condition as well as available product dimensions. Please contact the business unit Open Die Forgings of voestalpine BÖHLER Edelstahl GmbH & Co KG.

**Sheet & Plates:** Product Variant may differ in terms of melting process, technical data, delivery, and surface condition as well as available product dimensions. Please contact voestalpine BÖHLER Bleche GmbH & Co KG.

*The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.*

**voestalpine BÖHLER Edelstahl GmbH & Co KG**  
 Mariazeller Straße 25  
 8605 Kapfenberg, AT  
 T. +43/50304/20-0  
 E. [info@bohler-edelstahl.at](mailto:info@bohler-edelstahl.at)  
<https://www.voestalpine.com/bohler-edelstahl/de/>

  
 ONE STEP AHEAD.